



GL-32™ Grease Injectors

High-performance injectors for reliable machine lubrication



Accurate, reliable and adjustable lubrication for every lube point on your machine

- Longer lasting seal design for trouble-free performance
- Easy to design, setup and operate
- Flexible—add or subtract lube points without redesigning your system
- High performance—handles up to NLGI #2 grease

**Long-life seal
outperforms
the competition!**





Precision-honed components for reliable operation in challenging environments



Adjustable to fit any machine

One Piece Cast Injector


One piece design for added durability

Output Adjustment Nut

Adjustable output volume from 0.001–0.008 in³ (0.02–0.13 cm³) makes it easy to customize each individual lube point

Visual Indicator Pin

Convenient front-mounted cycle pin indicator confirms that the injector is functioning properly

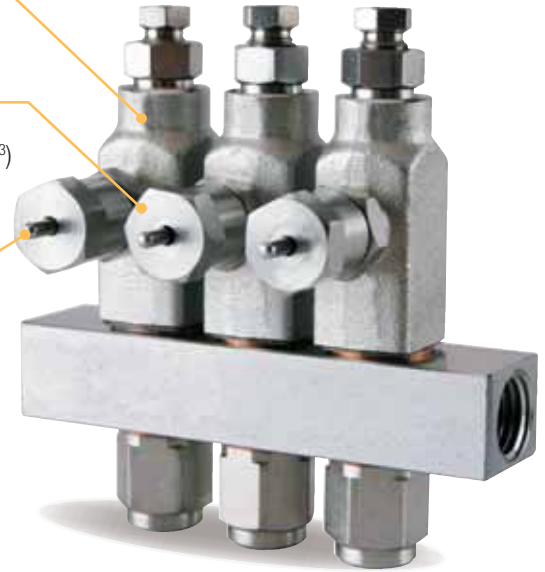

Technical Specifications

Maximum operating pressure	3500 psi (241 bar)
Minimum operating pressure	1200 psi (83 bar)
Typical operating pressure	1500 psi (103 bar)
Reset (vent) pressure	200 psi (13.7 bar)
Output volume per cycle (adjustable)	0.001–0.008 in ³ (0.02–0.13 cm ³)
Recommended fluids	Grease up to NLGI #2
Instruction manual	313798

Ordering Information

24A920	GL-32 Injector, (replacement)
24A921	GL-32 1-Injector manifold
24A922	GL-32 2-Injector manifold
24A923	GL-32 3-Injector manifold
24A924	GL-32 4-Injector manifold
24A919	GL-32 Injector, Stand-Alone
24B360	GL-32 repair kit
24B677	Injector outlet replacement kit (nut and ferrule)

Contact us today!

To receive product information or talk with a Graco representative, call 800-533-9655 or visit us online at www.graco.com.